

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000094

International filing date: 14 January 2005 (14.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0401289.4  
Filing date: 21 January 2004 (21.01.2004)

Date of receipt at the International Bureau: 17 March 2005 (17.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

# HARGREAVES ELSWORTH

Patent Attorneys

6 Charlotte Square  
Newcastle-Upon-Tyne  
NE1 4XF  
United Kingdom

T: +44 (0) 191 211 1974  
F: +44 (0) 191 247 7102  
E: office@heip.co.uk  
www.heip.co.uk

20 November, 2006

The European Patent Office  
Treasury & Accounts Department  
D-80298  
Munich  
Germany

EPO - Munich  
78

23. Nov. 2006

Our Ref: P048/EP

Dear Sirs


05701863.2

**RE REPLENISHMENT OF DEPOSIT ACCOUNT NO. 28050328 IN THE NAME OF  
HARGREAVES ELSWORTH**

Please be advised that we have today transferred EUR 650.00 into our deposit account no. 28050328. This payment is to include settlement of the administrative fee due on application no. 05701863.2, referred to in your Notification no. 30252. We enclose a debit order for this administrative fee.

Please acknowledge receipt of this letter by dating and returning the attached Form 1037.

Yours sincerely,



Dominic Elsworth CPA, EPA  
Patent Attorney

Zur Kasse  
(A) 50.- €

Enc. Debit order, Form 1037



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 23 February 2005

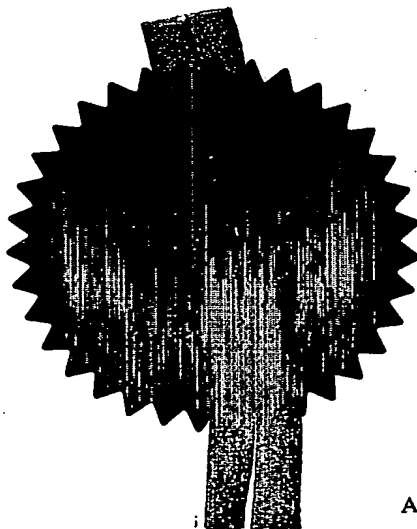

Patents Form 1/77

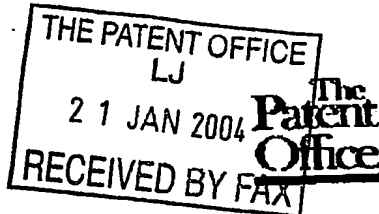Patents Act 1977  
(Rule 16)22JAN04 EB67176-1 D10192  
P01/7700 0.00-0401289.4 NGNE**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

**The Patent Office**Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

P048/GB

2. Patent application number  
(The Patent Office will fill in this part)

0401289.4

21 JAN 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)Brian MENCE  
17 Frederick Gardens  
Penshaw  
Tyne & Wear  
DH4 3JY

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8792434001

4. Title of the Invention

Adjustable Width Excavator Bucket

5. Name of your agent (if you have one)

Dominic Elsworth

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Hargreaves Elsworth  
Rotterdam House  
116 Quayside  
Newcastle-upon-Tyne, NE1 3DY

Patents ADP number (if you know it)

8353526001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:)

No

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d)

Patents Form 1/77

0092231 21 Jan 04 09:42

14

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

**Continuation sheets of this form**

Description 6

Claim(s) 2

Abstract 1

Drawing(s) 3

only

f

10. If you are also filing any of the following, state how many against each item.

**Priority documents****Translations of priority documents****Statement of inventorship and right to grant of a patent (Patents Form 7/77)****Request for preliminary examination and search (Patents Form 9/77)****Request for substantive examination (Patents Form 10/77)****Any other documents (please specify)**

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

21 Jan 04

12. Name and daytime telephone number of person to contact in the United Kingdom

Dominic Elsworth - 0191 206 4033

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office

**Patents Form 1/77**

0092231 21 Jan 04 09:42

DUPLICATE

## ADJUSTABLE WIDTH EXCAVATOR BUCKET

### Field of the Invention

The invention relates to buckets for excavators, and in particular to a bucket the width of which can be adjusted. Such a bucket is particularly, but not exclusively useful when attached to an excavator or the backhoe of a backhoe loader.

### Background of the Invention

Backhoes and excavators are used to dig trenches. The width of trenches to be dug depends on the purpose of the trench. For example, if the trench is being dug in order to lay a telephone cable, the trench need not be as wide as a trench being dug to lay a foundation, or a surface water drain pipe.

To date, excavators have been provided with a number of different buckets each having a different width. When a trench of a different size is required, the bucket must be changed to the bucket whose width most closely matches the desired width of trench.

The requirement to change buckets, and to use a bucket of defined width presents a number of problems. First, it is necessary to buy a number of buckets, which is costly. Second, it is necessary to transport the different width buckets from site to site. Third, on building sites, when it is necessary to change the bucket, the vehicle must traverse the site to the location of the buckets, which wastes time and can cut up the site in wet conditions. Fourth, changing the buckets takes time and is a potential source of accidents (pins holding the bucket to the arm of the excavator are changed manually, and often buckets will not be stored on level sites, thereby requiring manual effort lever the bucket into a position where the holes in the bucket and arm of the excavator are aligned so that holding pins can be securely located in position). Fifth, the fact that buckets are of a defined

width, means that trenches can only be dug to match the particular bucket widths, resulting in some unnecessarily wide trenches being dug.

So far, attempts made to overcome some of the above-mentioned problems have concentrated on simplifying the attachment and release of buckets to the arm of the excavator. Whilst such systems do reduce the time taken to change buckets, and remove the need for personnel to be in the region of the bucket during change over, thereby reducing the potential for accident, many of the above-identified problems are not addressed.

The invention therefore seeks to provide an improved excavator bucket.

#### Summary of the Invention

According to the invention there is provided an adjustable width excavator bucket as specified in Claim 1.

One aspect of the invention provides a manual mechanism for adjusting the cutting width of the bucket.

Another aspect of the invention provides a remotely operable actuator for adjusting the cutting width of the bucket.

The adjustable width excavator bucket of the invention provides numerous benefits. First, it is not necessary to purchase or transport from site to site numerous buckets of different widths. Second, when on site, it is not necessary to change bucket to match a particular job, thereby removing downtime associated with moving the vehicle to the location where the desired bucket is stored and with changing the bucket. Also, the risk of accident during changing from one bucket to another is removed. Third, expensive systems for automatically coupling and uncoupling buckets to the excavator arm can be dispensed with, since the necessity to change buckets frequently will be

removed. Fourth, any cutting width between respective maximum and minimum cutting widths can be selected, thereby avoiding the need to dump excess spoil or pour unnecessarily large volumes of concrete.

#### Brief Description of the Drawings

In the drawings, which by way of example, illustrates embodiments of an adjustable width excavator bucket:

Figure 1 is a schematic representation of an excavator bucket according to one aspect of the invention;

Figure 2 is a plan view of the excavator bucket illustrated in Figure 1;

Figure 3 is a side view of the excavator bucket illustrated in Figures 1 and 2;

Figure 4 is a front view of the excavator bucket illustrated in Figures 1 to 3, with the sides of bucket parallel; and

Figure 5 is a side view of a bucket according to a second embodiment of the invention.

#### Detailed Description of the Preferred Embodiments

Referring now to Figure 1, there is shown an excavator bucket 1 comprising planar side walls 2 and a back plate 3, which includes a substantially arcuate portion 6 and a substantially planar portion 6a. The bucket is attachable to an arm of an excavator by means of a bracket assembly comprising a pair of spaced apart plates 12, each comprising apertures 13 through which pins can be passed to secure the bucket 1 to the excavator arm. The plates 12 are welded to the back plate 3.

On a front edge of each side wall 2, there is mounted a hinge 7. Also mounted to each hinge 7 is a variable width member comprising a side plate 4 and a base plate 5 connected substantially at



right angles to one another. As can be seen from Figure 1, it is an edge of the side plate 4 that is attached to the hinge 7. The side and base plates 4, 5 each have a free edge 4a, 5a, which in use comprise part of the cutting edge of the bucket. The base plates 5 extend beneath the substantially planar section 6a of the back plate 3, the lower surface of the said planar section 6a touching or being in close relation to the upper surface of the base plate 5. Attachment members 8 fixed to the inner surface of the side plates 4 are connected to a mechanism for varying the width of the bucket which shall be described in greater detail in relation to Figure 2.

Referring now to Figures 1 and 2, a width adjustment mechanism M comprises a pair of spaced apart plates 9 connected one to another by a web 16. Mounted rotatably in the web 16 is an externally threaded bar 15, which passes through an aperture in the back plate 3 of the bucket. An internally threaded nut 14 is axially aligned with the afore-mentioned aperture, and fixed to the back plate 3, for example by welding. By rotating the threaded bar 15 the distance between the plates 9 and the back plate 3 can be varied.

The mechanism M further comprises arms 8, one end of each arm being located between the said plates 9, and pivotally connected to a respective pin 10 which passing through apertures in the plates 9 and the arm 8. An edge 11 of each arm 8 is connected to the inside of one of the side plates 4, for example the edge 11 of an arm 8 may be welded to the inside of a side plate 4 in front of the hinge 7. In the example shown in Figure 2, the apertures in the plates 9 and the arm 8 are larger than the pin 10, and are sufficiently large to accommodate a bearing in the form of a bush 12 that surrounds the pin 10. The bush may be made of a compressible material such as rubber, in order that shock loads experienced during a digging operation are attenuated, rather than being transmitted directly to the other components of the mechanism M. In place of the bush 12, other suitable bearings could be used.

Each arm 8 further comprises a cam surface 13. The distance between the centres of the pins 10 located in the plates 9, and the shape of the cam surfaces 13 of the respective arms 8 is such that the cam surfaces touch each other.

In use, when the operator wants to change the cutting width of the bucket, he attaches a tool to, and then rotates, the threaded bar 15. As mentioned above, rotating the threaded bar 15 moves the plates 9 towards and away from the back plate 3. The arms 8 are fixed to the side plates 4, which are in turn pivotally attached to the side walls 2. Moving the plates 9 away from the back plate therefore causes the arms to pivot around pins 10, and a corresponding pivoting motion of the side plates 4, thereby adjusting the width between the cutting edges of the side plates 4.

Referring again to Figure 2, it can be seen that the axes of the hinges 7 lie in a plane forward of the plane in which the axes of the pins 10 lie. This is so that as the bucket digs, the force on the cutting edges 4a and 5a cause the ends of the arms 8 located in the mechanism M to be pushed together, and therefore the cam surfaces 13 to be pushed together. In this way the load is carried largely by the arms 8, the hinges 7, the side walls 2, and the side plates 4, rather than the mechanism M itself.

With the bucket 1 configured to provide the narrowest cutting width respective side plates 2 and 4 are aligned, and the side plates 4 of opposing sides of the bucket are substantially parallel. As shown by the broken line illustrating the edge of the base plates 5, in the narrowest cutting width configuration, the parallel free edges of the base plates 5 touch one another. The arrow X illustrates movement of a side plate 4 and its attached base plate 5 to a wider cutting width.

From Figure 3, the position of the threaded bar 15 and the nut 14 can be seen. The bucket 1 is attached to the arm of an excavator by suitable pins passing through the apertures 13 and corresponding apertures in the excavator arm. The position of the threaded bar 15 is such that it is easily accessible for adjustment of the bucket width.

Figure 6 illustrates a second embodiment of the invention in which the threaded bar 15 and nut 14 are replaced by a double acting short stroke hydraulic ram 20 powered by the hydraulic system of the excavator vehicle. Hydraulic fluid is delivered to the ram 20 through hydraulic hoses 21 and 22. The mechanism M is otherwise substantially identical to the mechanism M described with reference to Figures 1 to 5.


**Claims**

1. An excavator bucket having an adjustable cutting width, the bucket comprising a back plate, a pair of spaced apart side walls, and a width adjustment mechanism, wherein the distance between the side walls is adjustable to vary the cutting width of the bucket, and wherein the mechanism provides for adjustment of the distance between the said side walls.
2. An excavator according to Claim 1, wherein each side wall includes a hinge having a longitudinal axis and a side plate attached to the hinge for pivotal movement about the said axis, and wherein the mechanism provides for movement of the side plates about said axis to adjust the cutting width.
3. A bucket according to Claim 2, wherein the mechanism comprises a pair of arms, a mounting member and an actuator, wherein each one of the arms is attached to a respective one of the side plates, and to the mounting member, and wherein adjustment of the actuator generates the said movement of the side plates.
4. A bucket according to Claim 3, wherein each arm is fixedly attached to a respective one of the said side plates.
5. A bucket according to Claim 3 or 4, wherein each arm is pivotally connected to the mounting member.
6. A bucket according to Claim 5, wherein each arm is pivotally mounted in the mounting member about a bearing.
7. A bucket according to Claim 6, wherein the said bearing is a bush.
8. A bucket according to Claim 7, wherein the bush is made of a compressible material.
9. A bucket according to any of Claims 2 to 8, wherein each arm comprises a cam surface, and wherein each arm is pivotally mounted on the mounting means such that the said cam surface of one arm touches the corresponding cam surface of the other arm through the range of pivotal movement of the said arm.




10. A bucket according to any Claims 2 to 9, wherein the actuator comprises an externally threaded bar, which passes through a co-operating internally threaded bore, wherein one end of said bar is rotatably located in the mounting member.
11. A bucket according to any preceding claim, wherein the actuator comprises a piston and cylinder arrangement.
12. A bucket according to any of Claims 2 to 11, wherein the mounting member is located within the bucket in front of the back plate and behind the said longitudinal axis of the hinges.
13. A bucket according to Claim 12, wherein with the side plates opened to their widest position, the plane in which the pivot mountings of the arms lie remains between the back plate and the longitudinal axes of the hinges.
14. A bucket according to any preceding claim, wherein a base plate extends from a bottom edge of each side plate or side plate towards the centre of the bucket.
15. A bucket according to Claim 14, wherein a free edge of one base plate substantially abuts a free edge of the other base plate with the side plates in a substantially parallel configuration.
16. A bucket according to Claim 14 or 15, wherein another free edge of each base plate forms a cutting edge.
17. A bucket according to Claim 16, wherein a planar surface of each base plate substantially abuts a planar surface of the back plate.
18. An excavator bucket substantially as described with reference to, and as shown in, the drawings.

**Abstract****Adjustable Width Excavator Bucket**

In an adjustable width excavator bucket the bucket's cutting width is adjustable. The bucket comprises a back plate, a pair of spaced apart side walls, and a width adjustment mechanism, the distance between the side walls being adjustable to vary the cutting width of the bucket, the mechanism providing for adjustment of the distance between the said side walls.

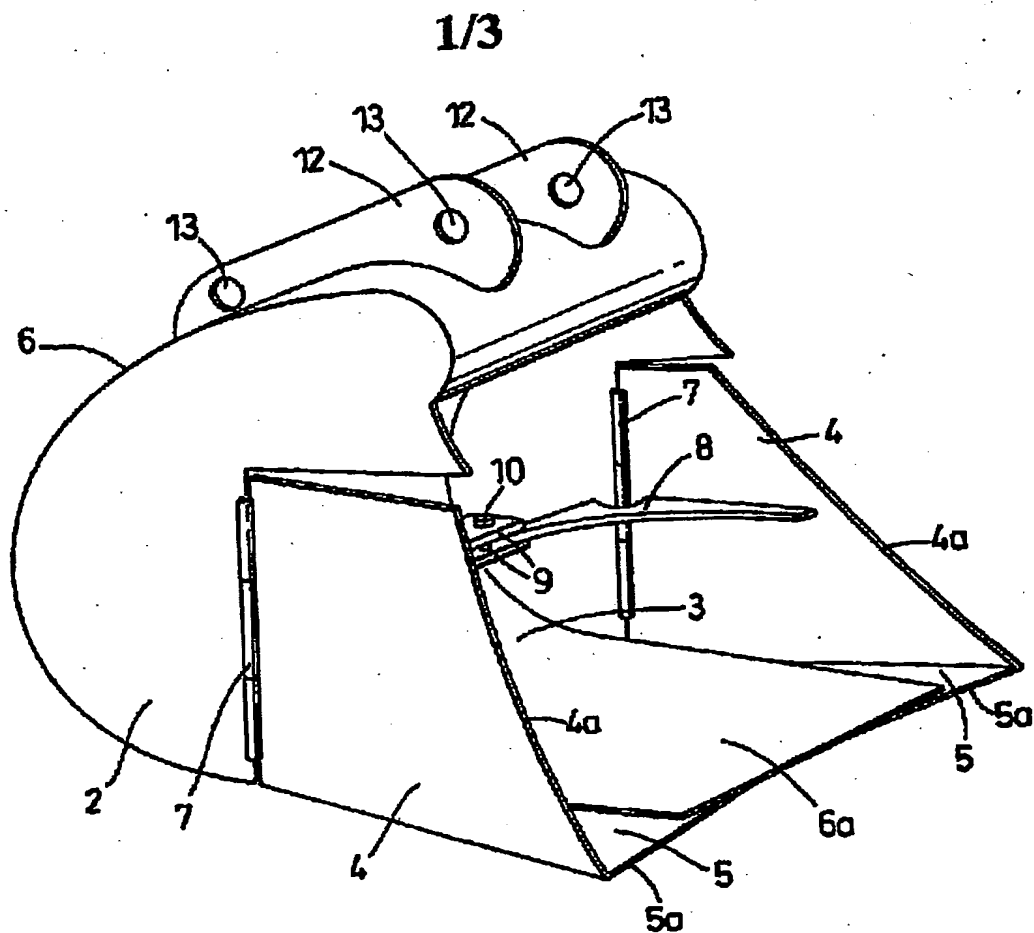


**Fig. 1**

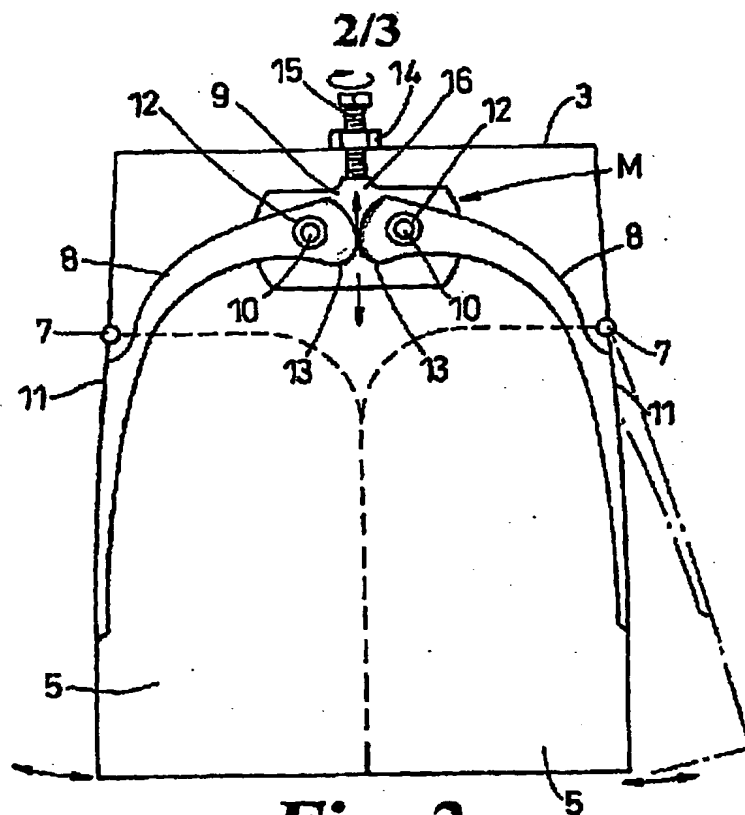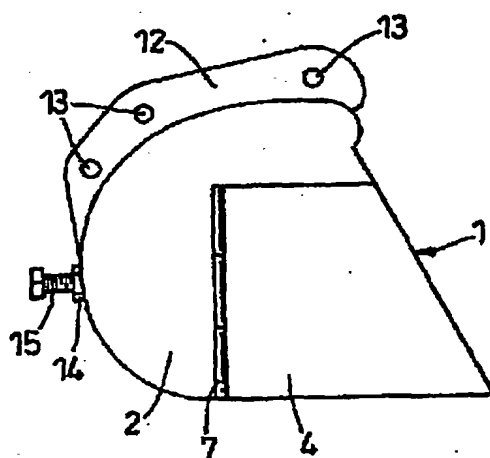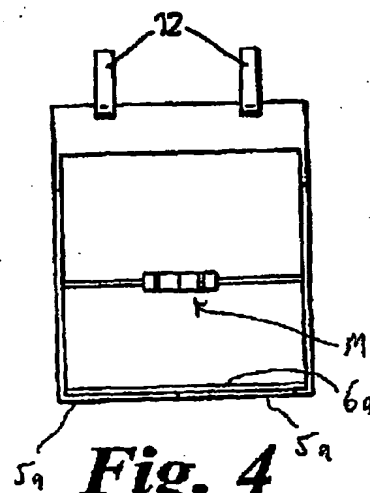**Fig. 2****Fig. 3****Fig. 4**



3/3

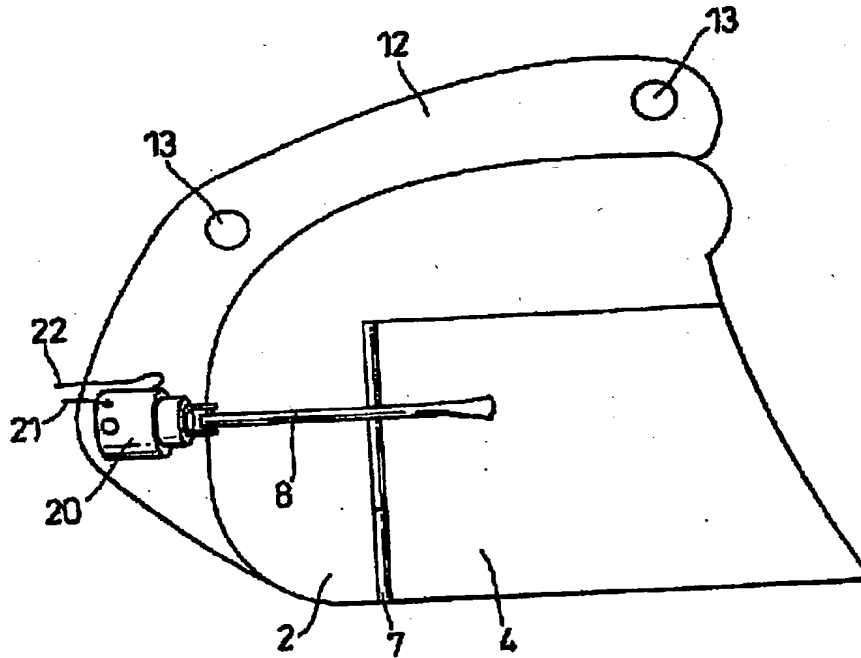

**Fig. 5**

THE PATENT OFFICE  
01 MAR 2005  
Published in Patents  
International Unit